




# Noodoe EV A22n

## Home EV Charging

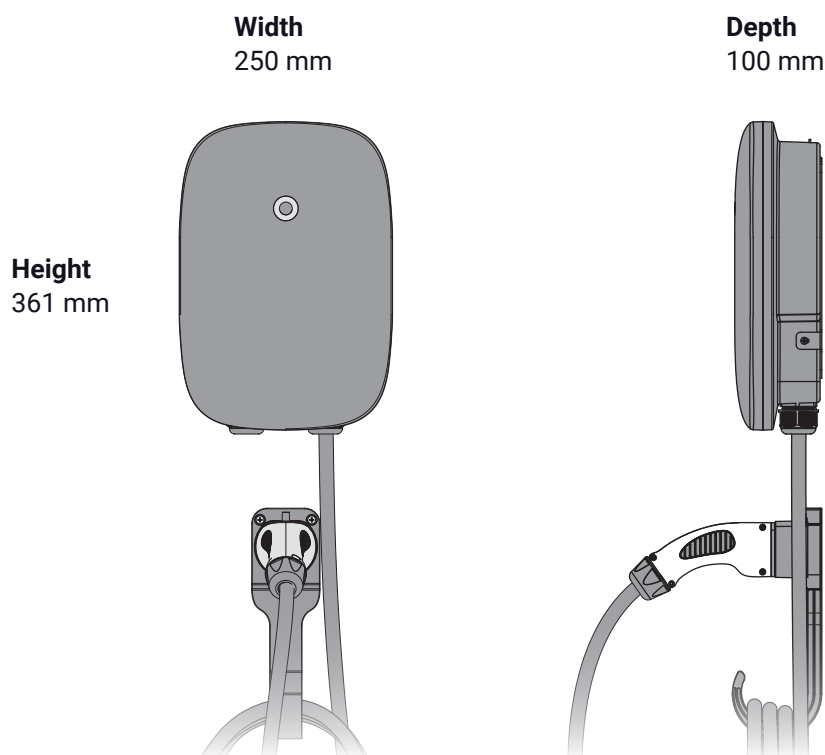

## SPECIFICATIONS

<b>Cloud service</b>	Noodoe EV OS
<b>Maximum output power</b>	22 kW
<b>Output power</b>	32 A @400 Vac, 3-phase
<b>Vehicle connector</b>	IEC 62196-2 Type 2
<b>Charging cable length</b>	5 m
<b>Input power</b>	3-phase, 5-wire, 400 Vac, 32 A maximum
<b>Grounding system</b>	TN, TT
<b>Efficiency</b>	> 99%
<b>Power factor</b>	> 0.99
<b>Display</b>	LED indicator
<b>Ingress protection(IP)</b>	IP54
<b>Impact protection</b>	IK08
<b>Electrical protection</b>	Over voltage protection, under voltage protection, surge protection, ground fault protection, integrated 30 mA Type-A RCD with 6 mA DC leakage protection (RDC-DD) - meets IEC 62955, short circuit protection, over current protection, over temperature protection
<b>Operating temperature</b>	-30 °C to +50 °C
<b>Dimensions</b>	250 (W) x 361 (H) x 100 (D) mm
<b>Weight</b>	5.7 kg
<b>Certifications</b>	CE

Noodoe EV OS



**Noodoe Corp.**  
 15F., No.19-13,  
 Sanchong Road,  
 Nangang District,  
 Taipei City 11501,  
 Taiwan  
 +886 2 7722 0677  
 info@noodoe.com  
 noodoe.com